


SK42425

Premium Near Edge
Wax/Resin

Technical Data Sheet

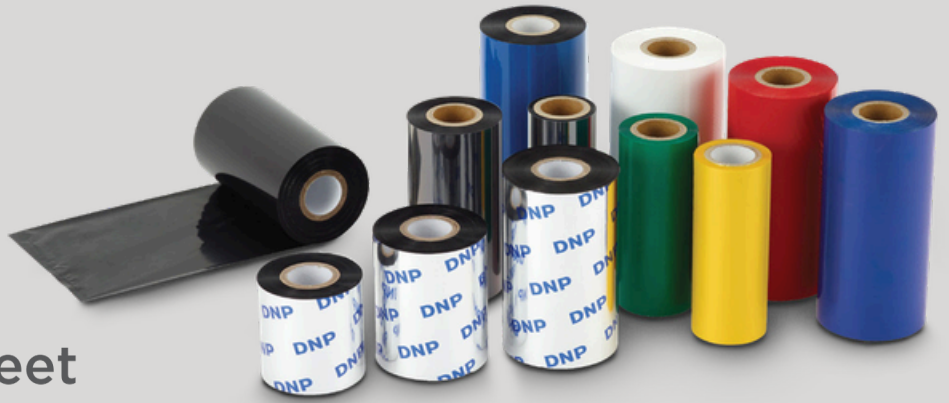

Product Description

SK42425 is part of a high-performance range of near-edge ribbon solutions, designed for thermal transfer printers with near-edge or corner-edge printheads. It features advanced backcoat technology for enhanced printhead protection, along with anti-static properties for smoother handling and improved durability. Engineered for efficiency, SK42425 produces dark, sharp images at high speeds and low energy settings across a wide range of label and tag materials, from paper to low-end synthetic substrates.

Applications



Food &
Beverage



Health &
Beauty



Inventory &
Logistics



Outdoor



Pharmaceutical



Retail

Recommended Substrates

Paper

- ✓ Coated paper
- ✓ Uncoated paper
- ✓ Coated tag
- ✓ Uncoated tag
- ✓ Gloss paper

Synthetics

- ✓ Kimdura®
- ✓ Polyolefin
- ✓ Polyart®
- ✓ Valeron®
- ✓ Polyethylene

Specialty Materials

- ✓ Tyvek®
- ✓ Tyvek Brillion®

Performance Characteristics

- ✓ Halogen-Free
- ✓ Prints excellent images on a wide variety of label and tag stocks
- ✓ Anti-static for easy handling and extended printhead life
- ✓ DNP's specially formulated backcoating for printhead protection
- ✓ Unbeatable edge definition for dark, dense images and improved scan rates

More Info



RIBBON PROPERTIES

Description	Result	Test Method
Ink	Wax/Resin	
Color	Black	Visual
Total Thickness	8.2 ± 0.5μ	Micrometer
Base Film Thickness	4.8 ± 0.3μ	Micrometer

DURABILITY OF PRINTED IMAGE

Description	Result	Test Method
Print Density	> 1.86	Densitometer
Smudge Resistance	A*	Colorfastness Tester - 100 Cycles @ 500 Grams with Cotton Cloth
Scratch Resistance	A*	Colorfastness Tester - 50 Cycles @ 200 Grams with Stainless Steel Pointed Tip

Label Stock: Coated Paper Print Speed: 6 IPS

*American National Standard Institute (ANSI) Grade Levels A, B, C, D, and F, where A is excellent, B is above average, C is average, D is below average, and F is poor.



The information on this data sheet was obtained in DNP laboratories. Measured values may vary slightly when tested in a different environment. Information contained within this document is subject to change without notification.

S & K ASIA SDN. BHD.

17, Jalan TP 7/7, Section 26, SIME UEP Industrial Park, 40400 Shah Alam, Selangor, Malaysia.



+603-38508909



sales@snkasia.com



www.snkasia.com



S&K Asia Malaysia