




# TR6075Plus

All Purpose Resin

## Technical Data Sheet

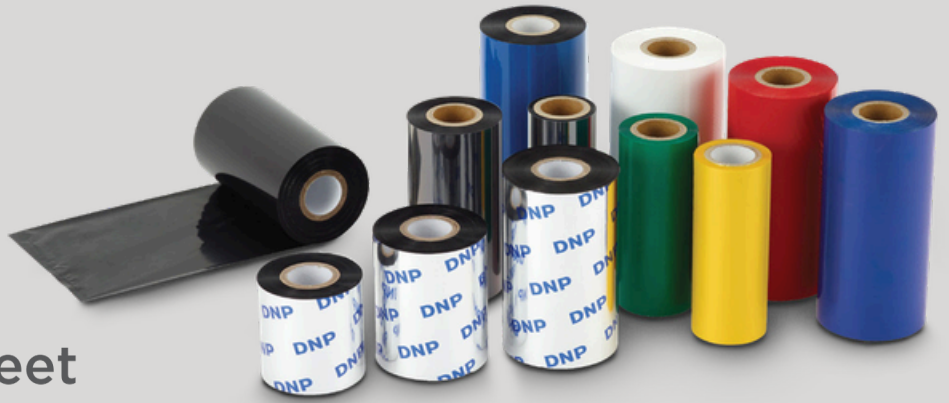

### Product Description

TR6075Plus is a halogen-free resin ribbon with wide label adaptability. TR6075Plus outperforms the competition in abrasion and solvent resistance, uses less print energy and is designed with DNP's standard anti-static and backcoat properties to protect printheads and extend printhead life. And, like all DNP ribbons, TR6075Plus is an industry leader in edge definition producing dark, dense images for improved scan rates.

### Applications



Automotive



Chemicals



Electronics



Food & Beverage



Health & Beauty



Inventory & Logistics



Outdoor



Pharmaceutical

### Recommended Substrates

#### Synthetics

- ✓ Polyester
- ✓ Polypropylene
- ✓ Polyethylene
- ✓ Polyolefin
- ✓ Vinyl

### Performance Characteristics

- ✓ Good sensitivity (high definition characters)
- ✓ Halogen-free
- ✓ Extreme durability and solvent resistance
- ✓ Extensive label adaptability expanding application options
- ✓ Unmatched scratch and heat resistance
- ✓ Unbeatable edge definition for dark, dense images and improved scan rates
- ✓ DNP's specially formulated backcoating for printhead protection
- ✓ Anti-static for easy handling and extended printhead life

More Info



## RIBBON PROPERTIES

| Description         | Result     | Test Method |
|---------------------|------------|-------------|
| Ink                 | Resin      |             |
| Color               | Black      | Visual      |
| Total Thickness     | 5.8 ± 0.8μ | Weight      |
| Base Film Thickness | 4.5 ± 0.4μ | Weight      |

## DURABILITY OF PRINTED IMAGE

| Description        | Result | Test Method   |
|--------------------|--------|---|
| Print Density      | > 1.80 | Densitometer  |
| Smudge Resistance  | A*     | Colorfastness Tester - 100 Cycles<br>@ 500 Grams with Cotton Cloth                  |
| Scratch Resistance | A*     | Colorfastness Tester - 50 Cycles<br>@ 200 Grams with Stainless Steel<br>Pointed Tip |

Label Stock: Top-coated Polyester      Print Speed: 6 IPS

\*American National Standard Institute (ANSI) Grade Levels A, B, C, D, and F, where A is excellent, B is above average, C is average, D is below average, and F is poor.



The information on this data sheet was obtained in DNP laboratories. Measured values may vary slightly when tested in a different environment. Information contained within this document is subject to change without notification.

**S & K ASIA SDN. BHD.**

17, Jalan TP 7/7, Section 26, SIME UEP Industrial Park, 40400 Shah Alam, Selangor, Malaysia.

+603-38508909

sales@snkasia.com

www.snkasia.com

S&K Asia Malaysia